

SOUNDSPHERE®

L O U D S P E A K E R S

110 B, 110 PAGE, Q-6 | OWNER'S MANUAL

110B, 110 PAGE, Q-6 | OWNER'S MANUAL

Please read the following instructions carefully before installing your Soundsphere® speaker. If you have any questions regarding installation that are not answered in the following directions, please contact your local sound contractor or the Soundsphere®/MSE Audio® technical support team. Contact information can be found on the back of the manual.

HK Hanging Kit

Hang Mounting from Above

The hanging kit is attached when ordered with the speaker from the factory. If ordered separately, attach as shown in figure 1.

- Hold the main hook above so the wires and 3 hooks will be straight as they are clipped on the speaker.
- Insert the spring clips into the bracket holes as shown. Attach the top clip to the mounting point making sure that the clips and cable are not twisted.

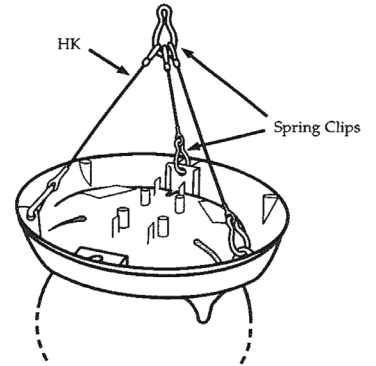


Figure 1

MBS Mounting Bracket

Preparing the Speaker

The speaker is prepared for use with the MBS mounting bracket when both are ordered together from the factory. If ordered separately, prepare the speaker as shown in figures 2 or 3, and 4.

- Begin by removing the plastic flashing from the hole in the reflector rim so that the screw can be inserted from the outside. Flashing can be removed with a 1/4" drill bit (figure 2), or it can easily be punched through using a hammer (figure 3). If using a 1/4" drill bit; be careful not to remove any material other than the flashing, or the speaker will not install correctly.
- Place the stop nut in the pocket as shown in figure 4. Start screw through outside hole, through stop nut contained in the pocket, and slightly beyond the interior hole (see figure 5).

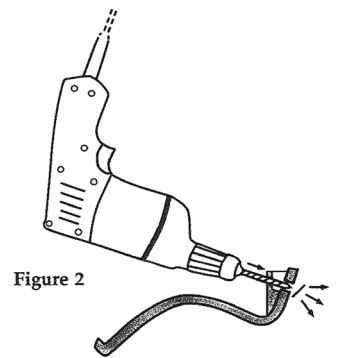


Figure 2

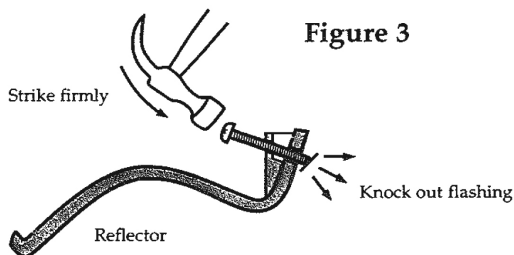


Figure 3

Strike firmly

Knock out flashing

Reflector

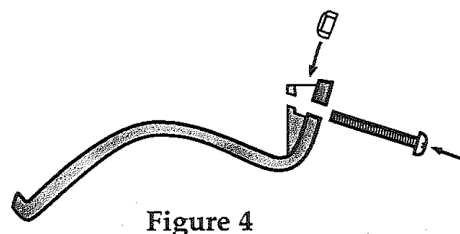


Figure 4

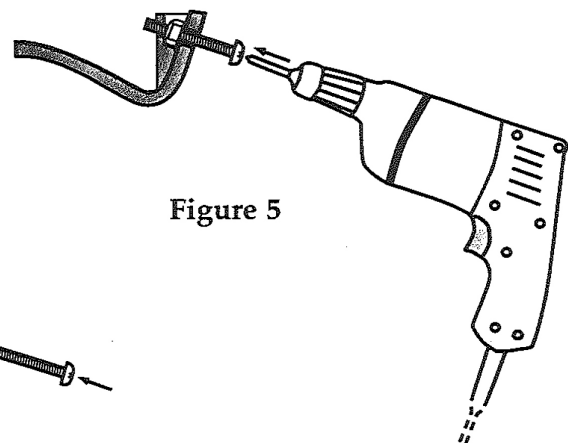


Figure 5

Installing the Speaker

The steel bracket is pre-fastened to the ceiling or wall, then the speaker is placed on the bracket and secured in the following steps (see figures 6 & 7):

- a) Fasten the bracket in the desired location, making sure that it is properly and safely mounted.
- b) Slide the side of the reflector opposite the screw over one end of the installed bracket.
- c) While holding the screw side against the surface, tighten the screw until the speaker is resting firmly in position.

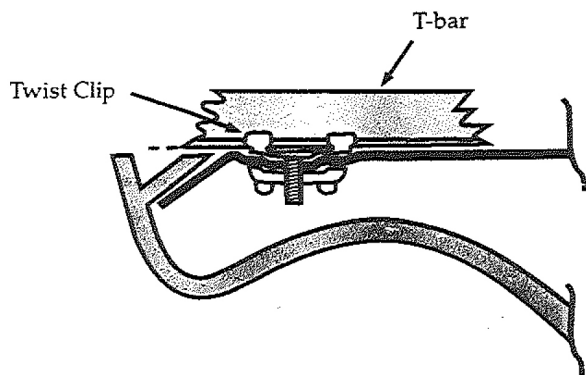


Figure 6

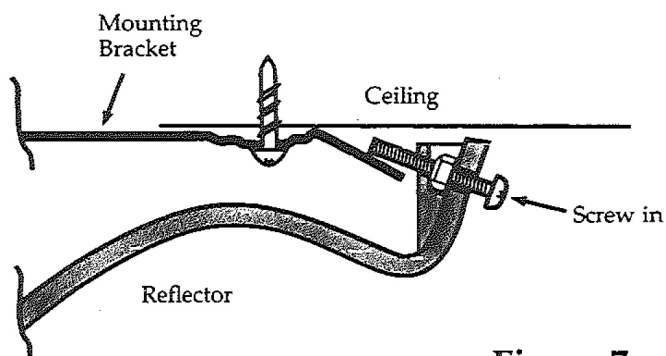


Figure 7

Suspended Ceiling T-Bar Mounting

Two Caddy Twist Clips and Twist Nuts are provided for connecting to suspended ceiling T-bars. Please refer to the enclosed Caddy Clip T-bar mounting instructions for more details (also, see figure 6 above).

- a) Place the clips about 8 3/4" apart on the T-bar. Check to be sure they have snapped on the bar correctly.
- b) Slide them into final position to fit through the holes in the mounting bracket. Tighten the thumb nuts securely.
- c) Secure the speaker per steps b and c (above), "Installing the Speaker".

TX-30 Transformer Installation Instructions

The TX-30 is designed for use with the Model 110B or Q-6 loudspeakers. Power taps are provided for 100V, 70V, and 25V systems:

	25V	70V	100V
White	30 Watts	---	---
Orange	15 Watts	---	---
Yellow	7.5 Watts	---	---
Brown	3.8 Watts	30 Watts	---
Blue	1.9 Watts	15 Watts	30 Watts
Violet	0.9 Watts	7.5 Watts	15 Watts
Green	0.5 Watts	3.8 Watts	7.5 Watts
Black	Common	Common	Common

Remember to clip and insulate unused input wires; shorting any input wire to another will reduce the volume level and place an unexpected load on the power amplifier.

When ordered with the Model 110B or Q-6, the TX-30 is mounted to the back of the reflector and the loudspeaker driver connections are made at the factory.

Use either black wire for input common or driver (-) connections.

